



Barrier 95 NEO


DESIGN meets TECHNOLOGY

Because you care about the aesthetic aspect of your project, we created **Barrier 95 NEO** with a functional design and harmonious volumetrically for any type of construction

Finishes are made with precision so that only the energy consumption decreases, but not safety. Enjoy the silence and increase thermal comfort, in any season.

Main features of the Barrier 95 NEO

- ▶ Coplanar sash - innovative design
- ▶ Window thermal transfer coeicient: $U_w - 0.8 W / m^2K^*$
- ▶ It has 6 constructive chambers
- ▶ 3 rows of seal (third one with sealing on the frame)
- ▶ Available thickness for glass package between 44 mm and 60 mm
- ▶ Sound protection up to 44 db
- ▶ Burglary protection up to class Rc3

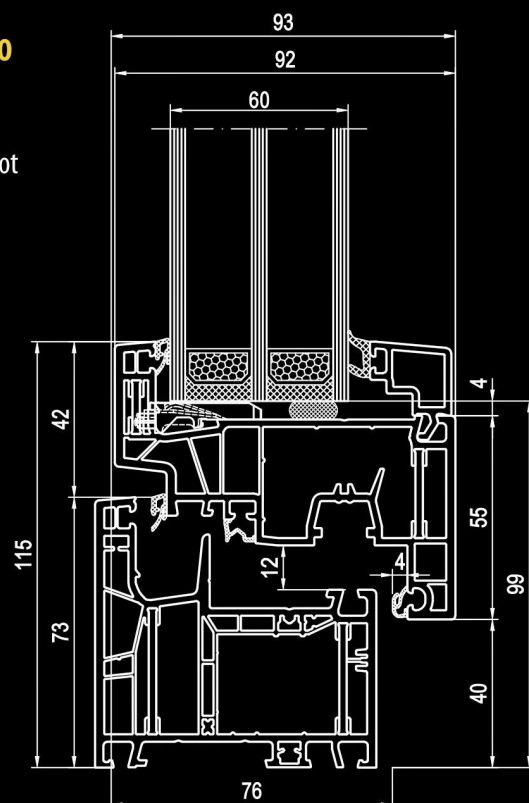

*In optimal conguration